

Product Highlights

Power over Ethernet

Support for IEEE 802.3at/af Power over Ethernet (PoE) on ports 1 to 8 allows for powering of PoE-powered devices up to 250M

PoE Power Budget

A large 96 W PoE power budget and up to 30 W per port for simultaneously powering multiple PoE-compatible devices

Plug-and-play

Plug-and-play installation means the switch can be quickly and easily installed without the need for any additional configuration



DES-F1010P-E

250M 10-Port 10/100 Switch with 8 PoE Ports and 2 Uplink Ports

Features

High-Speed Networking

- 10 10/100 Mbps Ethernet ports
- Full/half-duplex for Ethernet/Fast Ethernet

Functions

- VLAN
- EXTEND
- PoE
- QoS

Easy Setup

- Plug-and-play installation
- Auto MDI/MDI-X crossover on all ports

Stylish Design

- Compact lightweight chassis
- Noise-free operation

PoE Functionality

- Eight PoE ports
- IEEE 802.3af/at compliant
- 96 W total power budget
- Up to 30 W power output per PoE port

The D-Link DES-F1010P-E 10 Port 10/100 Switch with 8 PoE Ports enables you to connect Power over Ethernet (PoE) devices such as wireless access points (APs), IP cameras, and IP phones to the network. Built with home and small business users in mind, the DES-F1010P-E is compact and operates silently, making it ideal for most rooms and offices.

Power over Ethernet

DES-F1010P-E features eight 10/100BASE-T ports that support the IEEE 802.3af and IEEE 802.3at PoE protocols, supplying up to 30 W on each PoE port up to 250m and providing a total power budget of 96W. You can connect compatible devices to the DES-F1010P-E without using an additional power supply. This allows you to save on cabling and to install devices in locations without immediate access to power outlets.

High Performance

The DES-F1010P-E features plug-and-play installation and requires no configuration. Auto MDI/MDI-X support on all ports removes the need for crossover cables when connecting to another switch or hub, and auto-negotiation on each port intelligently adjusts the port speed for compatibility with the connected device. With wire-speed filtering and store-and-forward switching, the DES-F1010P-E maximizes network performance while minimizing the transmission of bad network packets.

Function

The DES-F1010P-E, 6KV protected, is equipped with smart features with a switch of button such as

Extend - support up to 250m distance power supply

VLAN - Isolating ports 1-8 from each other can effectively suppress network storms and improve network performance


QoS - Prioritize the identified video data to make video transmission smoother

PoE - Automatic detection power of port, power off and restart

Compact and Silent

The compact design of the DES-F1010P-E allows placement in most locations, including those where space is at a premium. The desktop form factor provides everything you need to set up a new network or expand an existing network, while the fanless design ensures silent operation even in noise-sensitive areas such as workstations and meeting rooms.

Example Configuration

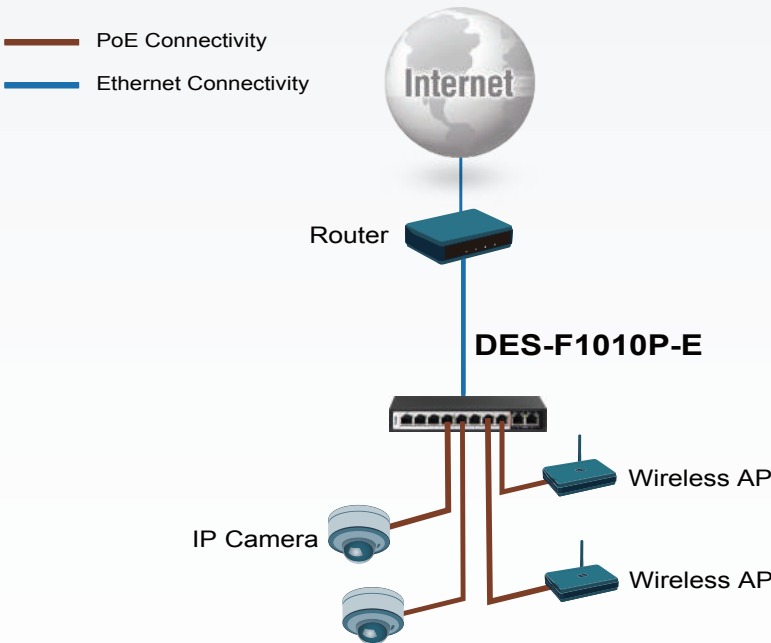

Technical Specifications

General

| | |
|--------------------------|---|
| Size | • Desktop |
| Interfaces | • 8 10/100 BASE-T ports • 2 10/100 BASE-T Uplink ports |
| Standards | • IEEE 802.3 10BASE-T Ethernet (twisted-pair copper) • IEEE 802.3x flow control • IEEE 802.3u 100BASE-TX Fast Ethernet (twisted-pair copper) • ANSI/IEEE 802.3 NWay auto-negotiation |
| Media Interface Exchange | • Auto MDI/MDI-X adjustment on all ports |
| Lighting Protection | • 6KV |
| Performance | |
| Switching Fabric | • 2 Gbps |
| Transmission Method | • Adopt Store-and-forward |

DES-F1010P-E 10-Port 10/100 switch with 8 PoE ports

| | |
|-------------------------------------|---|
| Data Transfer Rates | <ul style="list-style-type: none">• Fast Ethernet<ul style="list-style-type: none">• 100 Mbps• Ethernet<ul style="list-style-type: none">• 10 Mbps |
| Packet Filtering / Forwarding Rates | <ul style="list-style-type: none">• 10M port maximum 14800pps• 100M port maximum 148800pps |
| PoE | |
| PoE Standards | <ul style="list-style-type: none">• IEEE 802.3af• IEEE 802.3at |
| PoE-Capable Ports | <ul style="list-style-type: none">• Ports 1 to 8 |
| Power Budget | <ul style="list-style-type: none">• 96 W (36 W max. per PoE port) |
| LEDs | |
| Power | ✓ |
| Link/Activity | ✓ |
| Physical | |
| Weight | <ul style="list-style-type: none">• 0.95 kg |
| Dimensions | <ul style="list-style-type: none">• 184 x 75 x 27 mm |
| Power | <ul style="list-style-type: none">• External power adapter: 96W |
| Temperature | <ul style="list-style-type: none">• Operating: 0 to 40 °C (32 to 104 °F) |
| Humidity | <ul style="list-style-type: none">• Operating: 0% to 95% RH non-condensing• Storage: 0% to 95% RH non-condensing |
| Certifications | |
| Safety | <ul style="list-style-type: none">• LVD |
| EMI/EMC | <ul style="list-style-type: none">• CE• FCC |

Updated 2019/05/19